



Luminaire

Lina60-S


04S-200F-10GGD/940, S



EPD®

You will appreciate the L-Click system on the Lina60-S luminaire with a direct light distribution, which effectively saves you both time and money. How? The module simply clicks into the profile, so a lot of work is saved during assembly. This solution also prevents the direct touch of the LED technology and lengthens its operating life. The Lina60-S lighting system can be assembled creating endless lines and a big variety of shapes. In addition to great power output, the luminaire also has a great price. It will find its use in commercial, social and public spaces.

Technical drawing

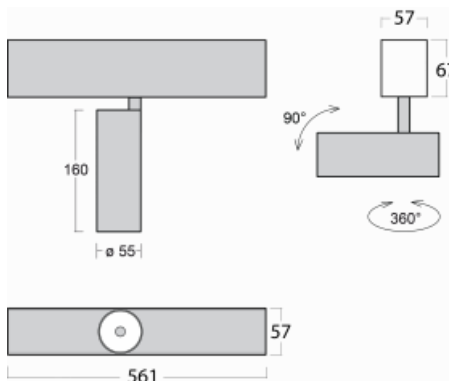

Type of installation	Recessed, Surface, Wall mounted, Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire recessed/surface/wall mounted/suspended
Dimensions	561 mm × 57 mm × 67 mm
Weight	2.28 kg
Light source	LED MODUL
Type of optical system	Reflector
Luminous flux*	1750 lm
Colour Temperature	4000 K cool white
Luminous efficacy	88 lm/W
MacAdam Light source	3
Colour rendering index	90
Beam angle	45°
UGR max. X=4H Y=8H, $\rho=70,50,20$	22.8

Curve



Luminaire power input* 20 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

*±10 %

Downloads

Installation instructions



Photos



Accessories

00-00300, N
 wire suspension
 2000mm

00-00301, N
 wire suspension
 4000mm

00-00302, N
 wire suspension
 6000mm

00-00354, K
 cable 5x0,75 1000mm

00-00355, K
 cable 5x0,75 2000mm

00-00356, K
 cable 5x0,75 4000mm

00-00357, K
 cable 5x0,75 6000mm

00-00363, K
 cable 5x1,5 2000mm

00-00364, K
 cable 5x1,5 4000mm

00-00365, K
 cable 5x1,5 6000mm

00-00366, K
 cable 7x0,75 2000mm

00-00367, K
 cable 7x0,75 4000mm

00-00368, K
 cable 7x0,75 6000mm

00-00370, S
 ceiling cup 80x80x32mm

00-00500
 wire for emergency
 lighting XX-XXXX-20

00-00600, F
 ceiling fastening for
 luminaires 132-5xxK,
 04-2000x, 05-2000x,
 09-200x - 1 piece

00-20700, B
 2 pcs of wall fastening
 Lipo/Lina

04-00200, N
 straight connector

04-01200, F
 Accessory for gear-tray
 release

04-20101, S
 2xend cap - metal, 5-
 conductor terminal box,
 grommet

04-20103, S
 2xend cap - plastic, 5-
 conductor terminal box,
 grommet

04-20900, F
 bracket for installation
 of suspended type of
 profile as recessed
 trimless