

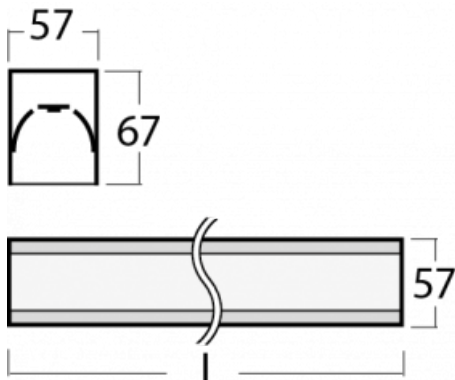

**Luminaire**

# Lina60-S

04S-200K-60GGD/830, W


**EPD<sup>®</sup>**

You will appreciate the L-Click system on the Lina60-S luminaire with a direct light distribution, which effectively saves you both time and money. How? The module simply clicks into the profile, so a lot of work is saved during assembly. This solution also prevents the direct touch of the LED technology and lengthens its operating life. The Lina60-S lighting system can be assembled creating endless lines and a big variety of shapes. In addition to great power output, the luminaire also has a great price. It will find its use in commercial, social and public spaces.

**Technical drawing**


|                      |   |
|----------------------|---|
| Type of installation | Recessed, Surface, Wall mounted, Suspended, 3 circuit track |
|----------------------|---|

|                    |        |
|--------------------|--------|
| Light distribution | Direct |
|--------------------|--------|

|                 |        |
|-----------------|--------|
| Luminaire shape | Linear |
|-----------------|--------|

|                          |       |
|--------------------------|-------|
| Colour of the luminaires | White |
|--------------------------|-------|

|          |           |
|----------|-----------|
| Material | Aluminium |
|----------|-----------|

|          |                      |
|----------|----------------------|
| Lifetime | L90/B50 50 000 hours |
|----------|----------------------|

|          |           |
|----------|-----------|
| Warranty | 60 months |
|----------|-----------|

|                           |   |
|---------------------------|---|
| Description of luminaires | Luminaire recessed/surface/wall mounted/suspended/3 circuit track |
|---------------------------|---|

|            |                         |
|------------|-------------------------|
| Dimensions | 3366 mm × 57 mm × 67 mm |
|------------|-------------------------|

|        |        |
|--------|--------|
| Weight | 7.9 kg |
|--------|--------|

|              |           |
|--------------|-----------|
| Light source | LED MODUL |
|--------------|-----------|

|                        |               |
|------------------------|---------------|
| Type of optical system | Opal diffuser |
|------------------------|---------------|

|               |                |
|---------------|----------------|
| Luminous flux | 9350 lm ± 10 % |
|---------------|----------------|

|                    |                   |
|--------------------|-------------------|
| Colour Temperature | 3000 K warm white |
|--------------------|-------------------|

|                   |          |
|-------------------|----------|
| Luminous efficacy | 126 lm/W |
|-------------------|----------|

|                      |   |
|----------------------|---|
| MacAdam Light source | 2 |
|----------------------|---|

|                        |    |
|------------------------|----|
| Colour rendering index | 80 |
|------------------------|----|

|                                   |      |
|-----------------------------------|------|
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 26.4 |
|-----------------------------------|------|

## Curve



Luminaire power input 74.4 W ± 10 %

Connection of the luminaires DALI dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

## Downloads

Installation instructions



Photos



**Accessories**


**00-00300, N**  
wire suspension  
2000mm



**00-00301, N**  
wire suspension  
4000mm



**00-00302, N**  
wire suspension  
6000mm



**00-00354, K**  
cable 5x0,75 1000mm



**00-00355, K**  
cable 5x0,75 2000mm



**00-00356, K**  
cable 5x0,75 4000mm



**00-00357, K**  
cable 5x0,75 6000mm



**00-00363, K**  
cable 5x1,5 2000mm



**00-00364, K**  
cable 5x1,5 4000mm



**00-00365, K**  
cable 5x1,5 6000mm



**00-00366, K**  
cable 7x0,75 2000mm



**00-00367, K**  
cable 7x0,75 4000mm



**00-00368, K**  
cable 7x0,75 6000mm



**00-00370, W**  
ceiling cup 80x80x32mm



**00-00501**  
wire for emergency  
lighting XX-XXXX-40



**00-00600, F**  
ceiling fastening for  
luminaires 132-5xxK,  
04-2000x, 05-2000x,  
09-200x - 1 piece



**00-20700, W**  
2 pcs of wall fastening  
Lipo/Lina



**04-00200, N**  
straight connector



**04-01200, F**  
Accessory for gear-tray  
release



**04-20101, W**  
2xend cap - metal, 5-  
conductor terminal box,  
grommet



**04-20103, W**  
2xend cap - plastic, 5-  
conductor terminal box,  
grommet



**04-20900, F**  
bracket for installation  
of suspended type of  
profile as recessed  
trimless