



Luminaire

Unda-S


100S-511K-50GDTD/830, W



Rob van Beek came up with the Unda-S designer light while sitting on the shore and gazing at the sea. The three-dimensional LED lighting was given the unique shape of a sea wave which we produced from bent aluminum sheet and a diffuser was added, enabling it to transmit and disperse light perfectly. You can use the luminaire separately or together. The creative concept of the Unda luminaire plays with freedom in design. A series of three-dimensional assemblies of circles, waves, and other shapes can be created from the bottom and top waves. The Unda livens up restaurants, bars, reception areas, as well as bank offices or living rooms.

Design Rob van Beek

Technical drawing

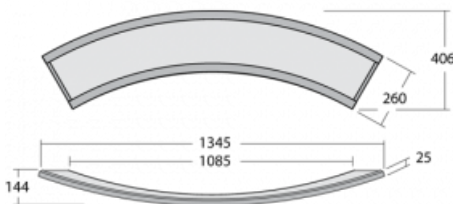

Type of installation	Suspended
Light distribution	Direct-indirect
Luminaire shape	Other shape
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
Dimensions	1345 mm × 406 mm × 144 mm
Weight	7.7 kg
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	5430 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	72 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, $\rho=70,50,20$	25.6

Curve



Luminaire power input 75.5 W \pm 10 %

Connection of the luminaires DALI or by switch (touch dimm) dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

Downloads

Installation instructions




Photos




Accessories

100-0001, W
end cap - metal



100-0002, F
arranging coupler



100-0003, W
ceiling cup, not suitable
for supply cable, 2m wire
suspension included