



## Luminaire

# Ilbi+

109-331K-40GEE/830, W




Combining maximum usefulness with the minimalist design of Matúš Opalka gives you the Ilbi+ family of lighting. We have, moreover, added a dual function. In addition to lighting up the room indirectly, it charges electronic devices through an integrated USB port and acts as a suspension system for inserting hooks, handles or shelves. You can hang your clothes, place books, hang kitchen utensils, lay a towel or other everyday necessities on the luminaire. Ilbi+ luminaires are great for hotels, households, meeting rooms, and thanks to their IP 44 housing also for wellness centers, bathrooms and swimming pool dressing rooms.

**Design** Matúš Opálka

|                                   |                          |
|-----------------------------------|--------------------------|
| Type of installation              | Wall mounted             |
| Light distribution                | Indirect                 |
| Luminaire shape                   | Angular                  |
| Colour of the luminaires          | White                    |
| Material                          | Aluminium                |
| Lifetime                          | L80/B20 50 000 hours     |
| Warranty                          | 5 years                  |
| Description of luminaires         | Luminaire wall mounted   |
| item description                  | +USB left groove         |
| Dimensions                        | 1176 mm × 37 mm × 106 mm |
| Weight                            | 3.9 kg                   |
| Light source                      | LED MODUL                |
| Type of optical system            | Opal diffuser            |
| Luminous flux*                    | 4530 lm                  |
| Colour Temperature                | 3000 K warm white        |
| Luminous efficacy                 | 117 lm/W                 |
| MacAdam Light source              | 3                        |
| Colour rendering index            | 80                       |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 10                       |

## Technical drawing

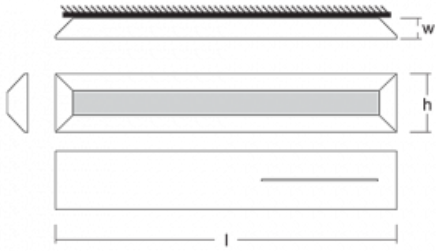

Luminaire power input\* 38.6 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

\*±10 %

## Curve



## Downloads

Installation instructions



Photos



## Accessories



**109-0001, F**  
wall fastening



**109-0003, W**  
hook



**109-0004, WD**  
shelf