



## Luminaire

# Lina80

11-531M-30GED/830, S



EPD®

Lina80 luminaires with an easy L-Click system feature an elegant and classic linear design with excellent illumination characteristics with both ceiling mounted and suspended versions, allowing them to fit into almost any space. Lina80 lighting is the right solution for offices, business, social and cultural spaces, as well as households and restaurants. With Tunable White, you set the white color temperature according to the time of day. The light thus provides optimal light helping you to focus on and concentrate on the work.

## Technical drawing



Type of installation	Suspended
Light distribution	Direct-indirect
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
Dimensions	1688 mm × 80 mm × 93 mm

Type of optical system	Matt parabolic louvre
------------------------	-----------------------

Luminous flux	2720 lm ± 10 %
---------------	----------------

Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy	49 lm/W
-------------------	---------

MacAdam Light source	2
----------------------	---

Colour rendering index	80
------------------------	----

UGR max. X=4H Y=8H, ρ=70,50,20	16.2
-----------------------------------	------

Luminaire power input	55.6 W ± 10 %
-----------------------	---------------

Connection of the luminaires	DALI dimmable
------------------------------	---------------


Electrical voltage	220-240V
--------------------	----------

Frequency	50/60Hz
-----------	---------




 IP 20

# Curve

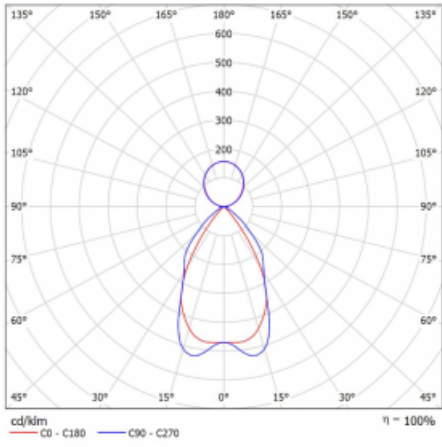

## Downloads

Installation instructions



Photos

