



## Luminaire


# Lina80-S

11S-501B-40GHE/840, B




Lina80-S luminaires are available in recessed, surface, suspended or wall mounted versions, including the illuminated corner segments. Lina80-S system luminaire can be used to create different shapes or long lines, with special joints that prevent any light to shine through, creating thus a seamless visual effect, suitable for small offices as well as big halls.

## Technical drawing

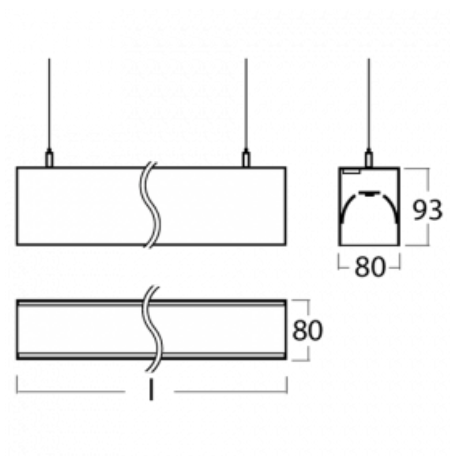

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Type of installation              | Wall mounted, Suspended          |
| Light distribution                | Direct-indirect                  |
| Luminaire shape                   | Linear                           |
| Colour of the luminaires          | Black                            |
| Material                          | Aluminium                        |
| Lifetime                          | L90/B50 50 000 hours             |
| Warranty                          | 5 years                          |
| Description of luminaires         | Luminaire wall mounted/suspended |
| Dimensions                        | 2244 mm × 80 mm × 93 mm          |
| Light source                      | LED MODUL                        |
| Type of optical system            | MP LOW UGR                       |
| Luminous flux*                    | 12210 lm                         |
| Colour Temperature                | 4000 K cool white                |
| Luminous efficacy                 | 126 lm/W                         |
| MacAdam Light source              | 2                                |
| Colour rendering index            | 80                               |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 15.4                             |

Curve

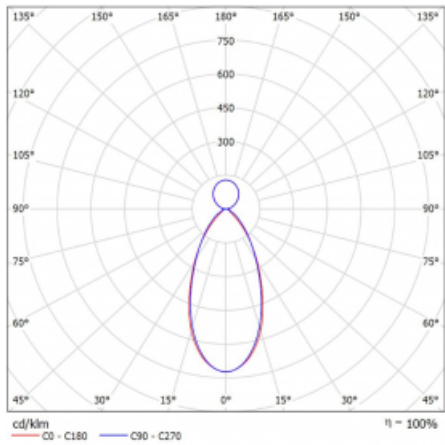

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 97.2 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

⏚ CE IP 40  
\*±10 %

## Downloads

Installation instructions



Photos

