

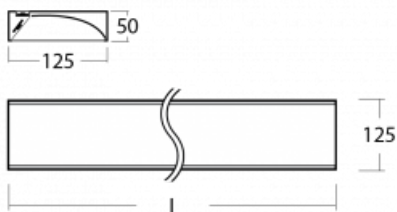

**Luminaire**

# Zuli

121-200D-20GEE/840, S

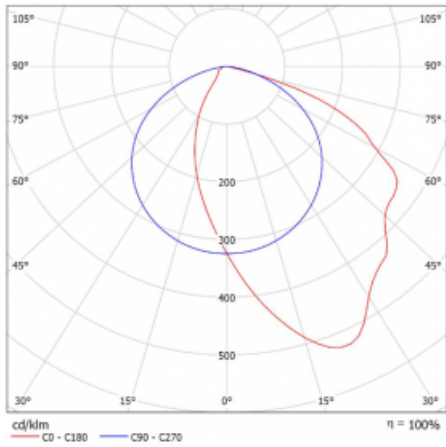


Do you remember the buzzing and flickering lights of your classroom? Fortunately these are long gone. Zuli pendant and surface-mounted LED luminaires ensure comfortable lighting in the classroom, offices and hospitals without these annoyances. These luminaires have direct or direct-indirect emission, with a choice of four lengths and microprism optics, grid and opal diffuser.

**Technical drawing**


|                           |                          |
|---------------------------|--------------------------|
| Type of installation      | Surface                  |
| Light distribution        | Direct                   |
| Luminaire shape           | Angular                  |
| Colour of the luminaires  | Silver                   |
| Material                  | Aluminium                |
| Lifetime                  | L80/B20 50 000 hours     |
| Warranty                  | 60 months                |
| Description of luminaires | Luminaire surface        |
| item description          | wall washer              |
| Dimensions                | 1145 mm × 125 mm × 50 mm |
| Weight                    | 3.5 kg                   |
| Light source              | LED MODUL                |
| Type of optical system    | Asymmetric reflector     |
| Luminous flux             | 2850 lm ± 10 %           |
| Colour Temperature        | 4000 K cool white        |
| Luminous efficacy         | 118 lm/W                 |
| MacAdam Light source      | 3                        |
| Colour rendering index    | 80                       |

## Curve



Luminaire power input 24.1 W  $\pm$  10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ IP 20

## Downloads

Installation instructions



Photos

