



Luminaire

Zuli

121-501D-20GED/840, S



Do you remember the buzzing and flickering lights of your classroom? Fortunately these are long gone. Zuli pendant and surface-mounted LED luminaires ensure comfortable lighting in the classroom, offices and hospitals without these annoyances. These luminaires have direct or direct-indirect emission, with a choice of four lengths and microprism optics, grid and opal diffuser.


Technical drawing



| | |
|------------------------------|--------------------------|
| Type of installation | Suspended |
| Light distribution | Direct-indirect |
| Luminaire shape | Angular |
| Colour of the luminaires | Silver |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire suspended |
| item description | wall washer |
| Dimensions | 1145 mm × 125 mm × 50 mm |
| Light source | LED MODUL |
| Type of optical system | Asymmetric reflector |
| Luminous flux | 4420 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 122 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| Luminaire power input | 36.1 W ± 10 % |
| Connection of the luminaires | DALI dimmable |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

 **CE** IP 20

Curve

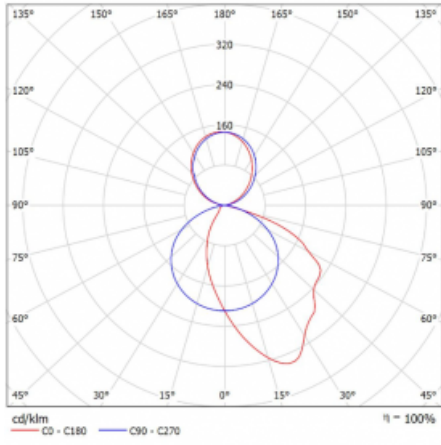

Downloads

Installation instructions



Photos

