



## Luminaire

# Zuli-S

121S-501K-25GEE/830, W



We realize that there is beauty in simplicity, so we have created our Zuli-S system luminaire. The Zuli-S luminaire is based on the timeless shape that everyone has known for many years. The luminaires come with a very efficient LED light source, thanks to which the luminaires have a very high economical and, last but not least, ecological value, as they require a relatively small amount of energy. Zuli-S luminaires can be fitted with a parabolic louver made of polished aluminium sheet or an opal diffuser.

## Technical drawing



|                           |                      |
|---------------------------|----------------------|
| Type of installation      | Suspended            |
| Light distribution        | Direct-indirect      |
| Colour of the luminaires  | White                |
| Material                  | Aluminium            |
| Lifetime                  | L80/B20 50 000 hours |
| Warranty                  | 60 months            |
| Description of luminaires | Luminaire suspended  |

|              |                          |
|--------------|--------------------------|
| Dimensions   | 1415 mm × 125 mm × 50 mm |
| Light source | LED MODUL                |

|                        |               |
|------------------------|---------------|
| Type of optical system | Opal diffuser |
|------------------------|---------------|

|               |                |
|---------------|----------------|
| Luminous flux | 5730 lm ± 10 % |
|---------------|----------------|

|                    |                   |
|--------------------|-------------------|
| Colour Temperature | 3000 K warm white |
|--------------------|-------------------|

|                   |          |
|-------------------|----------|
| Luminous efficacy | 134 lm/W |
|-------------------|----------|

|                      |   |
|----------------------|---|
| MacAdam Light source | 2 |
|----------------------|---|

|                        |    |
|------------------------|----|
| Colour rendering index | 80 |
|------------------------|----|

|                       |               |
|-----------------------|---------------|
| Luminaire power input | 42.8 W ± 10 % |
|-----------------------|---------------|


|                              |                                 |
|------------------------------|---------------------------------|
| Connection of the luminaires | Electronic ballast non-dimmable |
|------------------------------|---------------------------------|

|                    |          |
|--------------------|----------|
| Electrical voltage | 220-240V |
|--------------------|----------|

|           |         |
|-----------|---------|
| Frequency | 50/60Hz |
|-----------|---------|

⊕ CE IP 20

# Curve

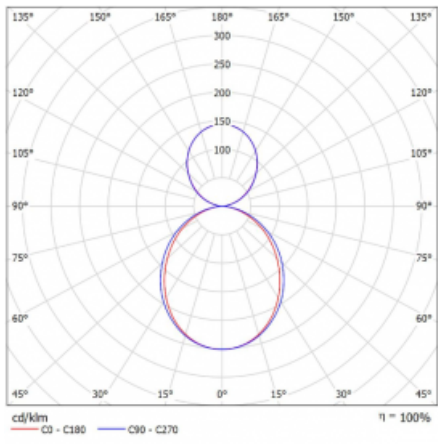

## Downloads

Installation instructions



Photos



**Accessories**

**00-00352, K**  
 cable 3x0,75 2000mm

**00-00355, K**  
 cable 5x0,75 2000mm

**00-00356, K**  
 cable 5x0,75 4000mm

**00-00358, K**  
 cable 3x0,75 4000mm

**00-00360, K**  
 cable 3x0,75 6000mm

**00-00363, K**  
 cable 5x1,5 2000mm

**00-00364, K**  
 cable 5x1,5 4000mm

**00-00365, K**  
 cable 5x1,5 6000mm

**00-00370, S**  
 ceiling cup 80x80x32mm

**121-00200, N**  
 straight connector

**121-00300, N**  
 wire suspension  
 2000mm

**121-00301, N**  
 wire suspension  
 4000mm

**121-00302, N**  
 wire suspension  
 6000mm

**121-20101, W**  
 2xend cap - plastic