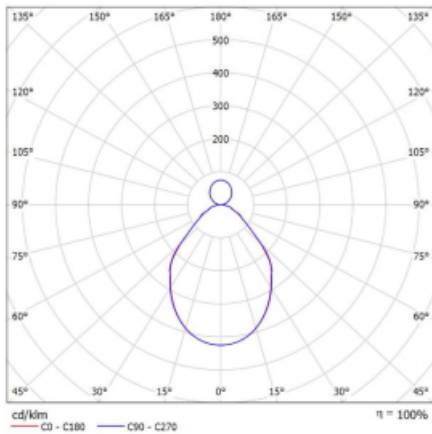



Luminaire

Rotao100

127-581I-10GED/830, B


Curve


| | |
|-----------------------------------|----------------------|
| Type of installation | Suspended |
| Light distribution | Direct-indirect |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire suspended |
| Dimensions | ø 850 mm × 87 mm |
| Weight | 9.4 kg |
| Light source | LED MODUL |
| Type of optical system | Microprisma |
| Luminous flux | 3680 lm ± 10 % |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 89 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 16.4 |

| | |
|------------------------------|-------------------|
| Luminaire power input | 41.5 W \pm 10 % |
| Connection of the luminaires | DALI dimmable |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

 **CE** IP 20

Downloads

Installation instructions



Photos

