



Luminaire


Rotao100

127-5C0K-10GEE/830, B



| | |
|---------------------------|----------------------|
| Type of installation | Suspended |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire suspended |
| Dimensions | ∅ 1500 mm × 87 mm |
| Weight | 19.7 kg |
| Light source | LED MODUL |

Curve

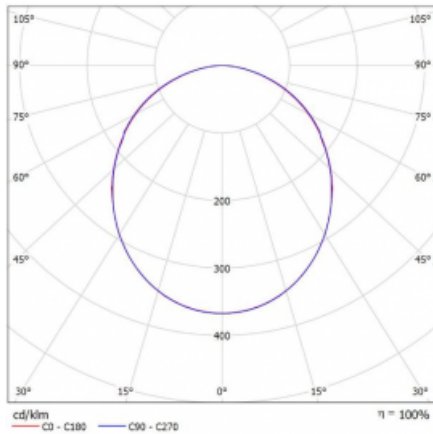

| | |
|------------------------|-------------------|
| Type of optical system | Opal diffuser |
| Luminous flux* | 6650 lm |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 109 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H | 22.5 |
| Y=8H, $\rho=70,50,20$ | |

| | |
|------------------------------|----------|
| Luminaire power input* | 61.1 W |
| Connection of the luminaires | ON/OFF |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

  IP 20

*±10 %

Downloads

Installation instructions



Photos

