

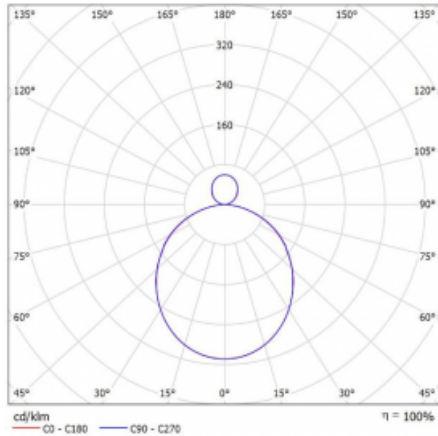

Luminaire

Rotao100

127-5F1K-10GEE/840, B



| | |
|---------------------------|----------------------|
| Type of installation | Suspended |
| Light distribution | Direct-indirect |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire suspended |
| Dimensions | ø 3000 mm × 87 mm |
| Weight | 32.7 kg |
| Light source | LED MODUL |

Curve


| | |
|-----------------------------------|-------------------|
| Type of optical system | Opal diffuser |
| Luminous flux | 18660 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 114 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 21 |

Luminaire power input 163 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 20

Downloads

Installation instructions



Photos

