



## Luminaire

# Sant


132-500K-20GEE/840, W



The Dutch designer Rob van Beek imbued this LED linear luminaire with an opal diffuser with a universal visage. In the Czech Republic, Sant was specially made for LED sources and Human Centric Lighting technology. In practice, it looks like the light changes intensity and color according to biological rhythms. People thus feel natural in closed spaces, because the lighting simulates daylight. If you are looking for individual linear lights for an office, school or hospital, you've just found it.


Design Rob van Beek

## Technical drawing

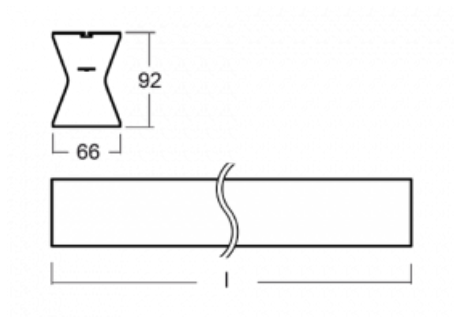

|                                        |                         |
|----------------------------------------|-------------------------|
| Type of installation                   | Suspended               |
| Light distribution                     | Direct-indirect         |
| Luminaire shape                        | Linear                  |
| Colour of the luminaires               | White                   |
| Material                               | Aluminium               |
| Lifetime                               | L80/B20 50 000 hours    |
| Warranty                               | 60 months               |
| Description of luminaires              | Luminaire suspended     |
| Dimensions                             | 1128 mm × 66 mm × 92 mm |
| Weight                                 | 3.3 kg                  |
| Light source                           | LED MODUL               |
| Type of optical system                 | Opal diffuser           |
| Luminous flux                          | 2190 lm ± 10 %          |
| Colour Temperature                     | 4000 K cool white       |
| Luminous efficacy                      | 116 lm/W                |
| MacAdam Light source                   | 2                       |
| Colour rendering index                 | 80                      |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 22                      |

Curve

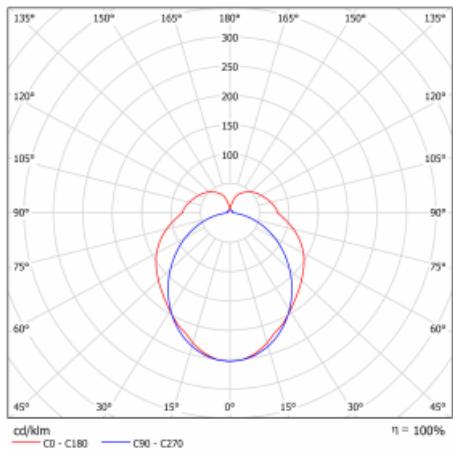

|                              |                                 |
|------------------------------|---------------------------------|
| Luminaire power input        | 18.8 W ± 10 %                   |
| Connection of the luminaires | Electronic ballast non-dimmable |
| Electrical voltage           | 220-240V                        |
| Frequency                    | 50/60Hz                         |

   IP 40

## Downloads

[Installation instructions](#)[Photos](#)