



## Luminaire



# Puri

143-060K-10GGQ/TC, W



We were thinking about how to achieve design purity, so we created a family of Puri recessed circular luminaires. Choose between the framed and frameless versions. You can mount it directly into the ceiling, without any cables or suspension fixtures. The framed version has a great advantage as it is very easy to disassemble. Using various diameters of the ceiling light, you can create combinations that will best suit the needs of your commercial spaces, offices, hotels or corridors. Puri blends in with the interior and can be easily combined with other families of circular luminaires.

## Technical drawing




|                              |                               |
|------------------------------|-------------------------------|
| Type of installation         | Recessed                      |
| Light distribution           | Direct                        |
| Luminaire shape              | Circular                      |
| Colour of the luminaires     | White                         |
| Material                     | Aluminium                     |
| Lifetime                     | L80/B20 50 000 hours          |
| Warranty                     | 5 years                       |
| Description of luminaires    | Luminaire recessed            |
| Dimensions                   | ø 620 mm × 90 mm              |
| Light source                 | LED MODUL                     |
| Type of optical system       | Opal diffuser                 |
| Luminous flux*               | 4980 lm                       |
| Colour Temperature           | 2700 K - 6500 K Tunable White |
| Luminous efficacy            | 103 lm/W                      |
| MacAdam Light source         | 3                             |
| Colour rendering index       | 90                            |
| Luminaire power input*       | 48.3 W                        |
| Connection of the luminaires | DALI DT8                      |
| Electrical voltage           | 220-240V                      |
| Frequency                    | 50/60Hz                       |

⊕ CE IP 20

\*±10 %

# Curve

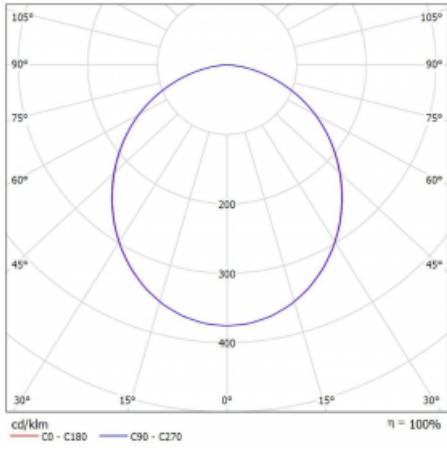

## Downloads

Installation instructions



Photos

