



Luminaire


Vali55

178-100S-10GGE/940, W



Its dimensions make the Vali55 luminaire the smallest cylindrical luminaire in our product range. The luminaires feature 4 types of reflectors with various angles of luminosity, thanks to which it also provides a large variability of light outputs. Vali55 has a very subtle minimalist shape, so it fits into a lot of interiors, where it always looks discreet and unobtrusive. The Luminaire comes in a surface, pendant or semi-recessed version, which greatly increases their versatility of use. All of this makes them suitable for commercial premises, bars or hotels or even residential buildings.

Technical drawing

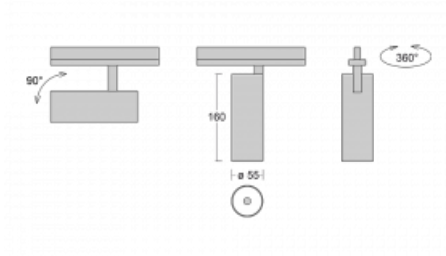

| | |
|------------------------------|---------------------------------|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire semi-recessed |
| Dimensions | ø 55 mm × 160 mm |
| Light source | LED MODUL |
| Type of optical system | Reflector |
| Luminous flux | 1750 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 88 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 90 |
| Beam angle | 17° |
| Luminaire power input | 20 W ± 10 % |
| Connection of the luminaires | Electronic ballast non-dimmable |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

 **CE** IP 20

Downloads

Installation instructions



Photos

