

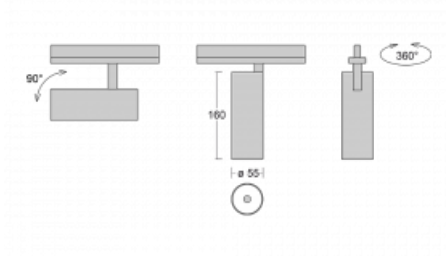

**Luminaire**

# Vali55

178-100U-10GGD/940, W



Its dimensions make the Vali55 luminaire the smallest cylindrical luminaire in our product range. The luminaires feature 4 types of reflectors with various angles of luminosity, thanks to which it also provides a large variability of light outputs. Vali55 has a very subtle minimalist shape, so it fits into a lot of interiors, where it always looks discreet and unobtrusive. The Luminaire comes in a surface, pendant or semi-recessed version, which greatly increases their versatility of use. All of this makes them suitable for commercial premises, bars or hotels or even residential buildings.

**Technical drawing**


|                           |                         |
|---------------------------|-------------------------|
| Type of installation      | Recessed                |
| Light distribution        | Direct                  |
| Luminaire shape           | Circular                |
| Colour of the luminaires  | White                   |
| Material                  | Aluminium               |
| Lifetime                  | L80/B20 50 000 hours    |
| Warranty                  | 60 months               |
| Description of luminaires | Luminaire semi-recessed |
| Dimensions                | ø 55 mm × 160 mm        |
| Light source              | LED MODUL               |

|                        |                   |
|------------------------|-------------------|
| Type of optical system | Reflector         |
| Luminous flux          | 1750 lm ± 10 %    |
| Colour Temperature     | 4000 K cool white |
| Luminous efficacy      | 88 lm/W           |
| MacAdam Light source   | 3                 |
| Colour rendering index | 90                |
| Beam angle             | 27°               |

|                              |               |
|------------------------------|---------------|
| Luminaire power input        | 20 W ± 10 %   |
| Connection of the luminaires | DALI dimmable |
| Electrical voltage           | 220-240V      |
| Frequency                    | 50/60Hz       |


 CE IP 20

## Downloads

Installation instructions



Photos

