





## Luminaire


190-240I-10GED/840, S



## Technical drawing



## Curve

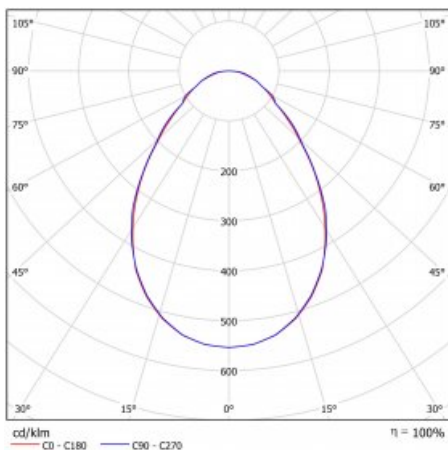

|                           |                                |
|---------------------------|--------------------------------|
| Type of installation      | Surface, Wall mounted          |
| Light distribution        | Direct                         |
| Luminaire shape           | Circular                       |
| Colour of the luminaires  | Silver                         |
| Material                  | Aluminium                      |
| Lifetime                  | L90/B50 50 000 hours           |
| Warranty                  | 60 months                      |
| Description of luminaires | Luminaire surface/wall mounted |
| Dimensions                | ∅ 400 mm × 62 mm               |
| Weight                    | 3.8 kg                         |
| Light source              | LED MODUL                      |

|                                   |                   |
|-----------------------------------|-------------------|
| Type of optical system            | Microprisma       |
| Luminous flux                     | 1910 lm ± 10 %    |
| Colour Temperature                | 4000 K cool white |
| Luminous efficacy                 | 103 lm/W          |
| MacAdam Light source              | 3                 |
| Colour rendering index            | 80                |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 18.1              |

|                              |                   |
|------------------------------|-------------------|
| Luminaire power input        | 18.6 W $\pm$ 10 % |
| Connection of the luminaires | DALI dimmable     |
| Electrical voltage           | 220-240V          |
| Frequency                    | 50/60Hz           |

   IP 40