





## Luminaire


190-240K-10GGD/830, S



## Technical drawing



## Curve

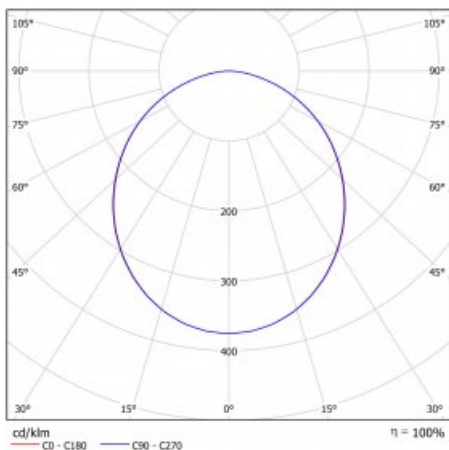

Type of installation Surface, Wall mounted

Light distribution Direct

Luminaire shape Circular

Colour of the luminaires Silver

Material Aluminium

Lifetime L90/B50 50 000 hours

Warranty 60 months

Description of luminaires Luminaire surface/wall mounted

Dimensions  $\varnothing$  400 mm  $\times$  62 mm

Weight 3.8 kg

Light source LED MODUL

Type of optical system Opal diffuser

Luminous flux 3420 lm  $\pm$  10 %

Colour Temperature 3000 K warm white

Luminous efficacy 113 lm/W

MacAdam Light source 3

Colour rendering index 80

UGR max. X=4H 23.9

Y=8H,  $\varrho=70,50,20$

Luminaire power input 30.3 W  $\pm$  10 %

---

Connection of the luminaires DALI dimmable

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

   IP 40