


Luminaire

Rundo

190-240K-10GGMI/830, W


Circular luminaires with an aluminium profile come in two heights, 62 mm and 87 mm. Rundo luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Rundo luminaires with a diameter of up to 1150 mm can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

| | |
|--|--------------------------------|
| Type of installation | Surface, Wall mounted |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire surface/wall mounted |
| Dimensions | ø 400 mm × 62 mm |
| Weight | 3.3 kg |
| Light source | LED MODUL |
| Type of optical system | Opal diffuser |
| Luminous flux | 3000 lm ± 10 % |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 115 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, $\rho=70,50,20$ | 23.5 |

Technical drawing



Luminaire power input 26 W \pm 10 %


Connection of the luminaires Electronic ballast non-dimmable, multiwatt with 1h emergency

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

Curve

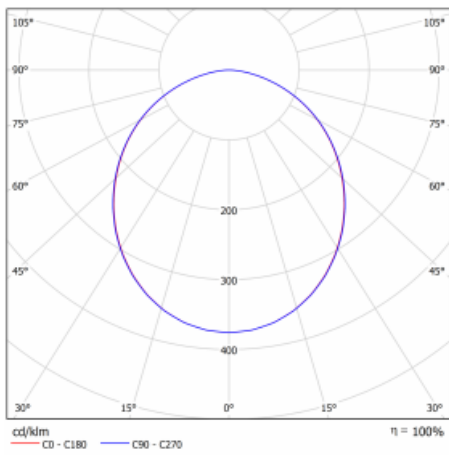

Downloads

[Installation instructions](#)[Photos](#)