

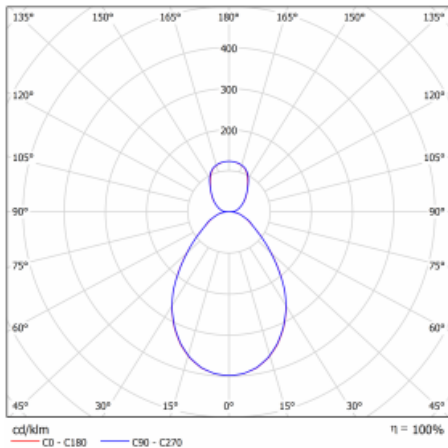

Luminaire

Rundo 62

190-251I-10GGEI/830, B



Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

Curve


Type of installation	Surface, Wall mounted
----------------------	-----------------------

Light distribution	Direct-indirect
--------------------	-----------------

Luminaire shape	Circular
-----------------	----------

Colour of the luminaires	Black
--------------------------	-------

Material	Aluminium
----------	-----------

Lifetime	L80/B10 50 000 hours
----------	----------------------

Warranty	5 years
----------	---------

Description of luminaires	Luminaire surface/wall mounted
---------------------------	--------------------------------

Dimensions	ø 500 mm × 62 mm
------------	------------------

Weight	5.7 kg
--------	--------

Light source	LED MODUL
--------------	-----------

Type of optical system	Microprisma
------------------------	-------------

Luminous flux*	4500 lm
----------------	---------

Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy	97 lm/W
-------------------	---------

MacAdam Light source	3
----------------------	---

Colour rendering index	80
------------------------	----

UGR max. X=4H	16.6
---------------	------

Y=8H, $\rho=70,50,20$	
-----------------------	--

Luminaire power input*	46.6 W
Connection of the luminaires	ON/OFF multiwatt
Electrical voltage	220-240V
Frequency	50/60Hz

   IP 40

*±10 %

