



Luminaire



190-260K-10GGM3I/840, S



| | |
|---------------------------|--------------------------------|
| Type of installation | Surface, Wall mounted |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | Silver |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 24 months |
| Description of luminaires | Luminaire surface/wall mounted |


| | |
|--------------|------------------|
| Dimensions | ø 600 mm × 62 mm |
| Light source | LED MODUL |

Technical drawing



| | |
|-----------------------------------|-------------------|
| Type of optical system | Opal diffuser |
| Luminous flux | 5500 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 136 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 22.7 |

Curve

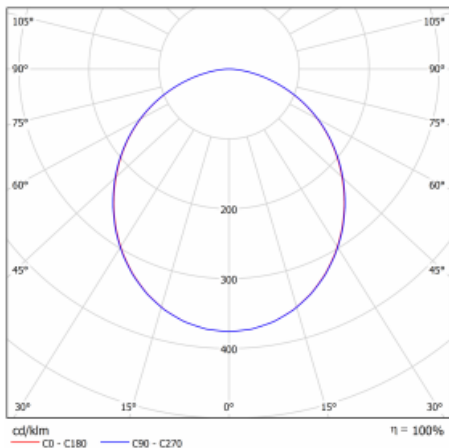

| | |
|------------------------------|--|
| Luminaire power input | 40.4 W \pm 10 % |
| Connection of the luminaires | Electronic ballast non-dimmable, multiwatt with 3h emergency |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

 **CE** IP 40