




Luminaire


190-260K-10GGQ/TC, B



Technical drawing

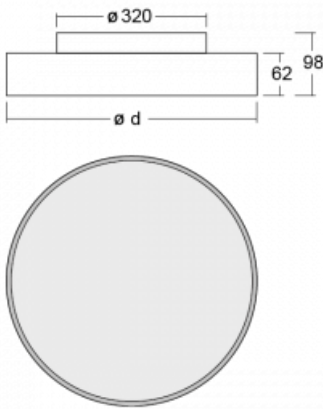

Curve

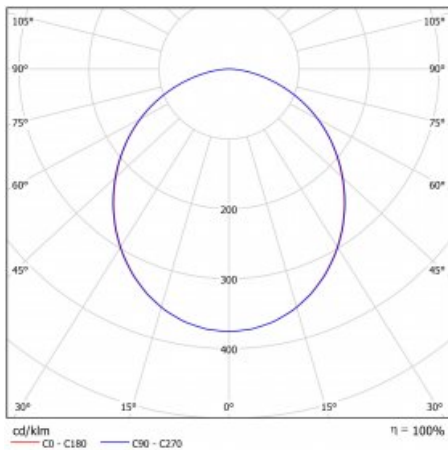

Type of installation	Surface, Wall mounted
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted
Dimensions	\varnothing 600 mm \times 62 mm
Weight	5.9 kg
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	4050 lm \pm 10 %
Colour Temperature	2700 K - 6500 K Tunable White
Luminous efficacy	98 lm/W
MacAdam Light source	3
Colour rendering index	90
UGR max. X=4H Y=8H, $\varrho=70,50,20$	21.6

Luminaire power input 41.4 W \pm 10 %

Connection of the luminaires DALI DT8

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 40