





Luminaire

190-261K-10GGMI/840, W




Type of installation	Surface, Wall mounted
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	24 months
Description of luminaires	Luminaire surface/wall mounted
Dimensions	∅ 600 mm × 62 mm
Weight	6 kg
Light source	LED MODUL

Technical drawing



Type of optical system	Opal diffuser
Luminous flux	5500 lm ± 10 %
Colour Temperature	4000 K cool white
Luminous efficacy	138 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	21

Curve

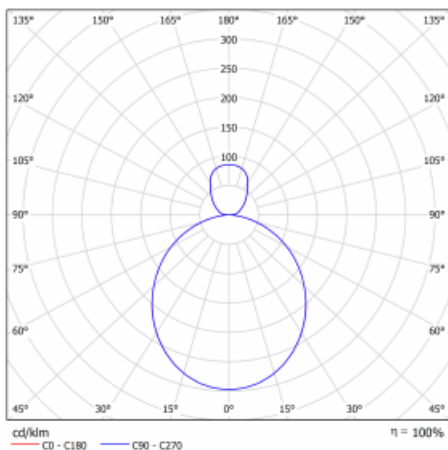

Luminaire power input	39.9 W \pm 10 %
Connection of the luminaires	Electronic ballast non-dimmable, multiwatt with 1h emergency
Electrical voltage	220-240V
Frequency	50/60Hz

 **CE** IP 40