



Luminaire



190-261K-10GGQ/TC, B



Type of installation	Surface, Wall mounted
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted


Dimensions	ø 600 mm × 62 mm
Weight	6.4 kg
Light source	LED MODUL

Technical drawing



Type of optical system	Opal diffuser
Luminous flux	4340 lm ± 10 %
Colour Temperature	2700 K - 6500 K Tunable White
Luminous efficacy	107 lm/W
MacAdam Light source	3
Colour rendering index	90
UGR max. X=4H Y=8H, ρ=70,50,20	20.2

Curve

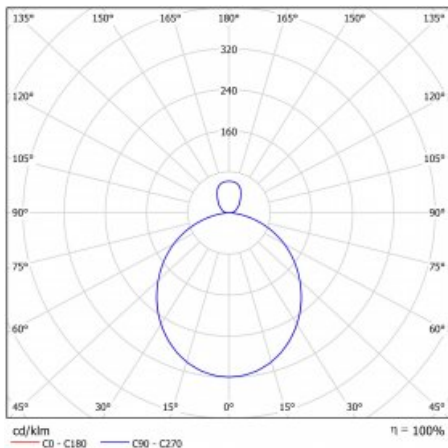

Luminaire power input 40.4 W \pm 10 %

Connection of the luminaires DALI DT8

Electrical voltage 220-240V

Frequency 50/60Hz

  IP 40