


Luminaire

Rundo


190-280K-10GEM3/840, W


Circular luminaires with an aluminium profile come in two heights, 62 mm and 87 mm. Rundo luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Rundo luminaires with a diameter of up to 1150 mm can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

| | |
|---------------------------|--------------------------------|
| Type of installation | Surface, Wall mounted |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L90/B50 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire surface/wall mounted |
| Dimensions | ø 850 mm × 62 mm |
| Light source | LED MODUL |

| | |
|-----------------------------------|-------------------|
| Type of optical system | Opal diffuser |
| Luminous flux | 7750 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 135 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 21.4 |

Technical drawing

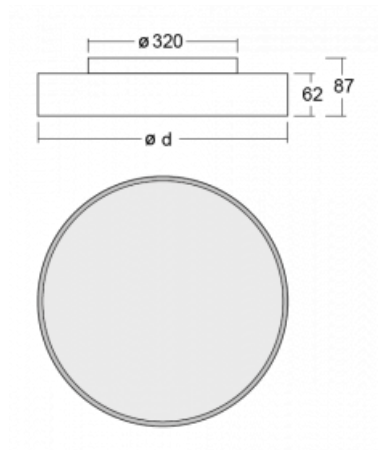

Luminaire power input 57.2 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable with 3h emergency

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

Downloads

Installation instructions



Photos

