




## Luminaire

190-281I-10GGM3I/830, B




Type of installation	Surface, Wall mounted
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted
Dimensions	ø 850 mm × 62 mm
Light source	LED MODUL

## Technical drawing

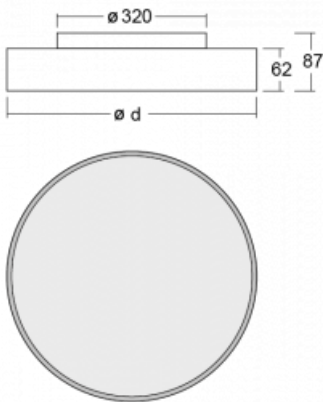

Type of optical system	Microprisma
Luminous flux	10500 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	118 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	17.6

## Curve

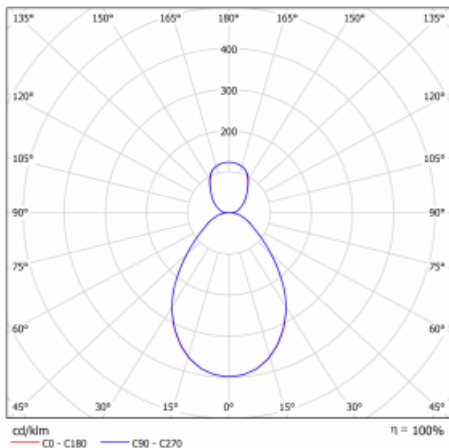

Luminaire power input	88.9 W $\pm$ 10 %
Connection of the luminaires	Electronic ballast non-dimmable, multiwatt with 3h emergency
Electrical voltage	220-240V
Frequency	50/60Hz

 **CE** IP 40