





Luminaire


190-281K-10GED/830, B



Technical drawing



Curve

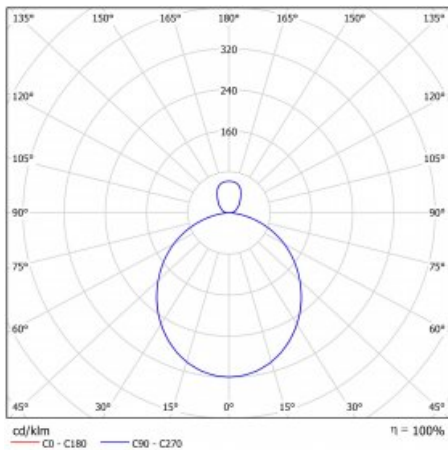

Type of installation	Surface, Wall mounted
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted
Dimensions	\varnothing 850 mm \times 62 mm
Weight	11.6 kg
Light source	LED MODUL

Type of optical system	Opal diffuser
Luminous flux	6390 lm \pm 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	131 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, $\rho=70,50,20$	20

Luminaire power input 48.9 W \pm 10 %

Connection of the luminaires DALI dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

   IP 40