



Luminaire



190-281K-10GGD/830, B



Type of installation	Surface, Wall mounted
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B10 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted


Dimensions	ø 850 mm × 62 mm
Weight	11.6 kg
Light source	LED MODUL

Technical drawing



Type of optical system	Opal diffuser
Luminous flux	10450 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	129 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	21.7

Curve

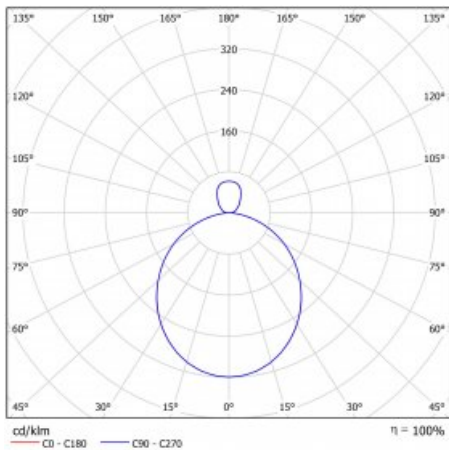

Luminaire power input 80.7 W \pm 10 %

Connection of the luminaires DALI dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

   IP 40