



Luminaire


Rofo

250-KOCB-10GEM3/865, W



The word integration perfectly describes the Rofo-S luminaires. The luminaires can literally be clicked into the metal ceiling system of leading manufacturers Knauf, Hunter Douglas, Dampa and T-Bar. The luminaires thus form an integral part of the ceiling as they are without a visible frame. The advantage is not only the ease of installation, but also the elegant design of the entire lighting system. The luminaire width is 100 mm and the luminaire lengths are, of course, multiples of 600 mm with regard to standardised ceiling dimensions. Thanks to the opal variant, but above all the microprismatic optical material, the specific power of up to 130lm/W and the luminous flux of 2000 lm/m while maintaining UGR<19, the luminaires are perfect for offices. But they also serve well in corridors, meeting rooms, auditoriums or laboratories.


Technical drawing

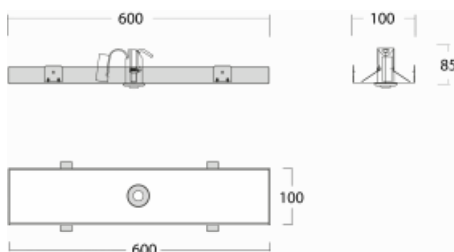

Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Plastic
Lifetime	L90/B50 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
item description	1W; Knauf; Adels connector
Dimensions	600 mm × 100 mm × 85 mm
Light source	LED MODUL
Type of optical system	Clear cover
Luminous flux	115 lm ± 10 %
Colour Temperature	6500 K cool white
Luminous efficacy	77 lm/W
Colour rendering index	80
Luminaire power input	1.5 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable with 3h emergency
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

Curve

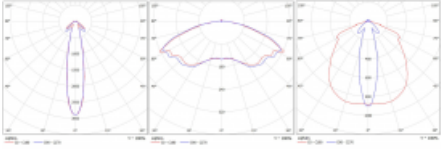

Downloads

Installation instructions



Photos

