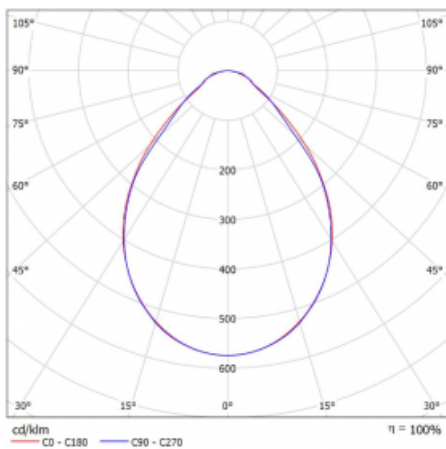



**Luminaire**

# Rofo

250S-K0CI-11GEE/830, W


**Curve**


Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
item description	Initial/Final profile; Knauf; Adels connector
Dimensions	600 mm × 100 mm × 62 mm
Light source	LED MODUL
Type of optical system	Microprisma
Luminous flux	820 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	132 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, $\rho=70,50,20$	17.7

Luminaire power input 6.2 W  $\pm$  10 %

---

Connection of the luminaires Electronic ballast non-dimmable

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

 **CE** IP 40