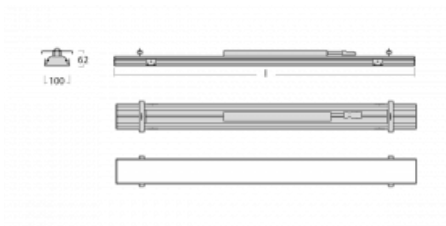
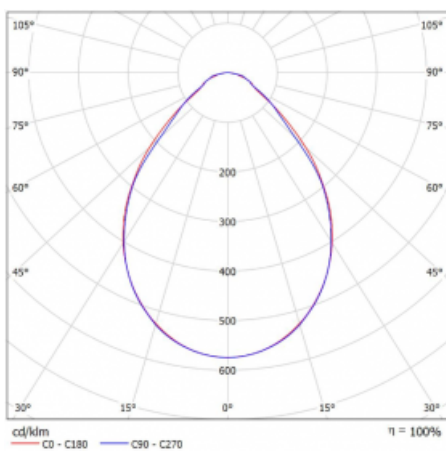



**Luminaire**

# Rofo

250S-K0CI-20GED/840, W


**Technical drawing**

**Curve**


|                                        |                          |
|----------------------------------------|--------------------------|
| Type of installation                   | Recessed                 |
| Light distribution                     | Direct                   |
| Luminaire shape                        | Linear                   |
| Colour of the luminaires               | White                    |
| Material                               | Aluminium                |
| Lifetime                               | L90/B50 60 000 hours     |
| Warranty                               | 5 years                  |
| Description of luminaires              | Luminaire recessed       |
| item description                       | Knauf; Adels connector   |
| Dimensions                             | 1200 mm × 100 mm × 62 mm |
| Light source                           | LED MODUL                |
| Type of optical system                 | Microprisma              |
| Luminous flux*                         | 1660 lm                  |
| Colour Temperature                     | 4000 K cool white        |
| Luminous efficacy                      | 137 lm/W                 |
| MacAdam Light source                   | 2                        |
| Colour rendering index                 | 80                       |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 17.8                     |

Luminaire power input\* 12.1 W

---

Connection of the luminaires DALI

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

  IP 40

\*±10 %