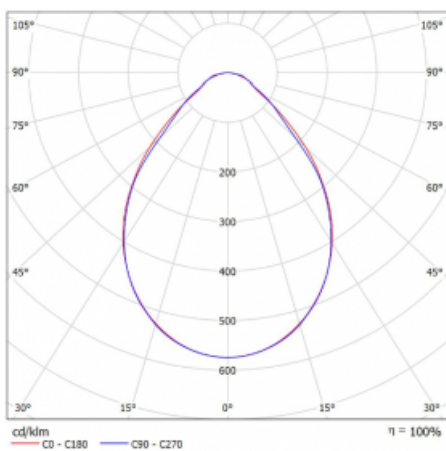



**Luminaire**

# Rofo

250S-K0CI-30GED/840, W


**Technical drawing**

**Curve**


|                                   |                          |
|-----------------------------------|--------------------------|
| Type of installation              | Recessed                 |
| Light distribution                | Direct                   |
| Luminaire shape                   | Linear                   |
| Colour of the luminaires          | White                    |
| Material                          | Aluminium                |
| Lifetime                          | L90/B50 60 000 hours     |
| Warranty                          | 5 years                  |
| Description of luminaires         | Luminaire recessed       |
| item description                  | Knauf; Adels connector   |
| Dimensions                        | 1800 mm × 100 mm × 62 mm |
| Light source                      | LED MODUL                |
| Type of optical system            | Microprisma              |
| Luminous flux*                    | 2490 lm                  |
| Colour Temperature                | 4000 K cool white        |
| Luminous efficacy                 | 137 lm/W                 |
| MacAdam Light source              | 2                        |
| Colour rendering index            | 80                       |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 17.8                     |

Luminaire power input\* 18.2 W

---

Connection of the luminaires DALI

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

  IP 40

\*±10 %