

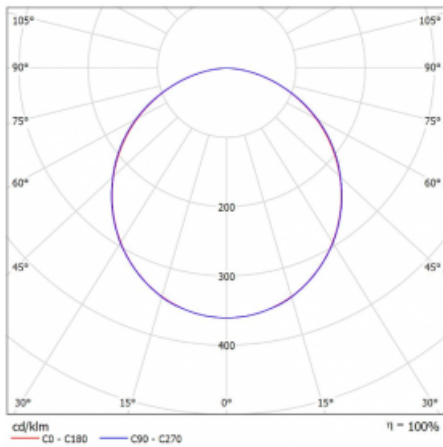

Luminaire

Rofo

250S-KOCK-11GGE/830, W



Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
item description	Initial/Final profile; Knauf; Adels connector
Dimensions	600 mm × 100 mm × 62 mm
Light source	LED MODUL

Curve


Type of optical system	Opal diffuser
Luminous flux	1240 lm \pm 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	132 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, $\rho=70,50,20$	23.4

Luminaire power input 9.4 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 40