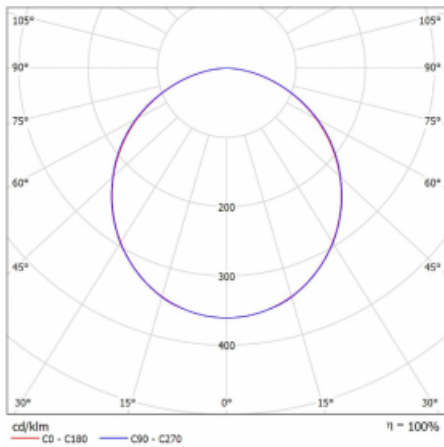



Luminaire

Rofo

250S-KOCK-11GGE/840, W


Curve


| | |
|-----------------------------------|---|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L90/B50 60 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire recessed |
| item description | Initial/Final profile; Knauf; Adels connector |
| Dimensions | 600 mm × 100 mm × 62 mm |
| Light source | LED MODUL |
| Type of optical system | Opal diffuser |
| Luminous flux | 1240 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 136 lm/W |
| MacAdam Light source | 2 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 23.4 |

Luminaire power input 9.1 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 40