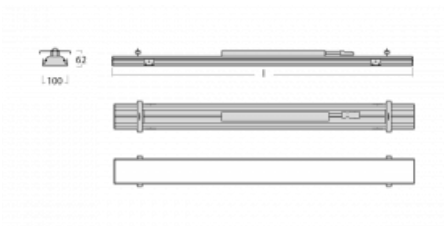
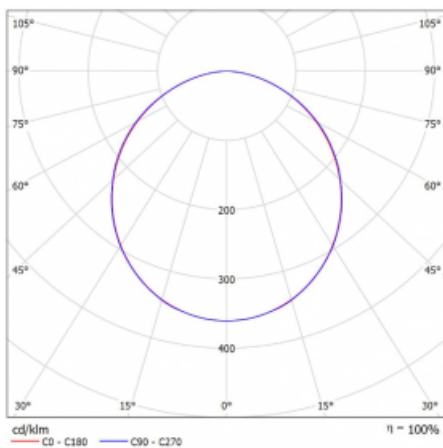



Luminaire

Rofo

250S-K0CK-30GGD/840, W


Technical drawing

Curve


Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	5 years
Description of luminaires	Luminaire recessed
item description	Knauf; Adels connector
Dimensions	1800 mm × 100 mm × 62 mm
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux*	3720 lm
Colour Temperature	4000 K cool white
Luminous efficacy	137 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	23.4

Luminaire power input* 27.2 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

  IP 40

*±10 %