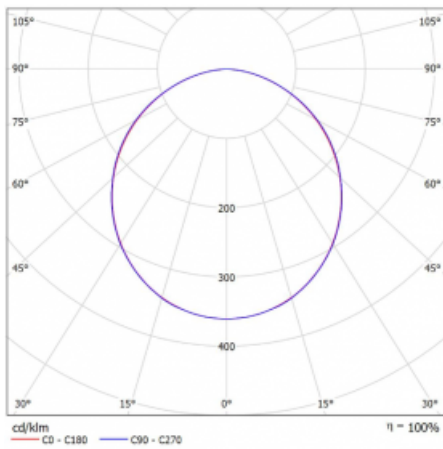



**Luminaire**

# Rofo

250S-KOCK-30GGE/830, W


**Technical drawing**

**Curve**


Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
item description	Knauf; Adels connector
Dimensions	1800 mm × 100 mm × 62 mm
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	3710 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	131 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	23.3

Luminaire power input	28.4 W $\pm$ 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50/60Hz

 **CE** IP 40