


Luminaire

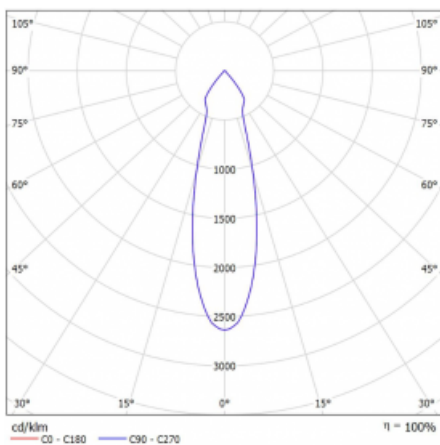
Rofo

250S-K0CU-30GDE/930, W



Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
item description	Knauf; Adels connector

Technical drawing

Curve


Dimensions	600 mm × 100 mm × 62 mm
Light source	LED MODUL
Type of optical system	Reflector
Luminous flux	1200 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	88 lm/W
MacAdam Light source	3
Colour rendering index	90
Beam angle	27°

Luminaire power input 40.8 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 20