


**Luminaire**

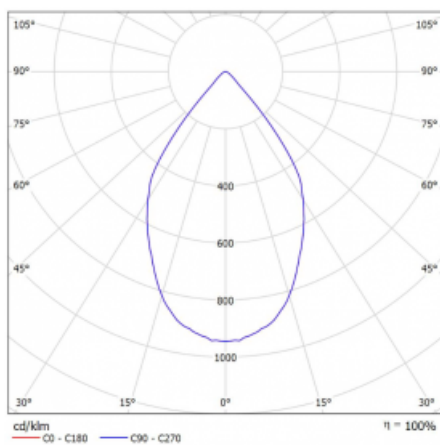
# Rofo

250S-K0CW-10GDE/940, W



|                           |                        |
|---------------------------|------------------------|
| Type of installation      | Recessed               |
| Light distribution        | Direct                 |
| Luminaire shape           | Linear                 |
| Colour of the luminaires  | White                  |
| Material                  | Aluminium              |
| Lifetime                  | L80/B20 50 000 hours   |
| Warranty                  | 60 months              |
| Description of luminaires | Luminaire recessed     |
| item description          | Knauf; Adels connector |

**Technical drawing**

**Curve**


|                        |                         |
|------------------------|-------------------------|
| Dimensions             | 600 mm × 100 mm × 62 mm |
| Light source           | LED MODUL               |
| Type of optical system | Reflector               |
| Luminous flux          | 1250 lm ± 10 %          |
| Colour Temperature     | 4000 K cool white       |
| Luminous efficacy      | 92 lm/W                 |
| MacAdam Light source   | 3                       |
| Colour rendering index | 90                      |
| Beam angle             | 68°                     |

Luminaire power input 13.6 W  $\pm$  10 %

---

Connection of the luminaires Electronic ballast non-dimmable

---

Electrical voltage 220-240V

---

Frequency 50/60Hz

---

 **CE** IP 20