


**Luminaire**

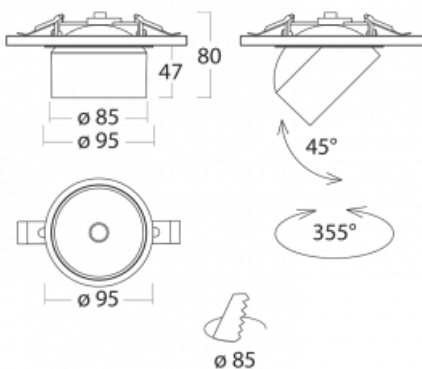
# Shift

26-100U-10GGV/830, W +  
00-00153EI



Designer Kryštof Nosál has created a luminaire with unrivalled variability. In addition, the Shift family of single luminaires allows for any method of installation. You can choose between a semi-recessed, surface and pendant version. The spot LED luminaire consists of 1, 2, 3 or 5 light sources, which can be moved along the axis of the luminaire body, tilted up to an angle of 45° and rotated up to 355°. The luminaire has 4 beam angles of 15°, 25°, 36°, 60°.

Design Kryštof Nosál

**Technical drawing**


|                           |                         |
|---------------------------|-------------------------|
| Type of installation      | Recessed                |
| Light distribution        | Direct                  |
| Luminaire shape           | Circular                |
| Colour of the luminaires  | White                   |
| Material                  | Aluminium               |
| Lifetime                  | L80/B20 50 000 hours    |
| Warranty                  | 60 months               |
| Description of luminaires | Luminaire semi-recessed |
| Dimensions                | ø 95 mm × 50 mm         |
| Light source              | LED MODUL               |

|                        |                       |
|------------------------|-----------------------|
| Type of optical system | MEDIUM - middle angle |
| Luminous flux          | 1770 lm ± 10 %        |
| Colour Temperature     | 3000 K warm white     |
| Luminous efficacy      | 72 lm/W               |
| MacAdam Light source   | 3                     |
| Colour rendering index | 90                    |
| Beam angle             | 25°                   |

|                              |  |
|------------------------------|--|
| Luminaire power input        | 24.5 W ± 10 %                              |
| Connection of the luminaires | Electronic ballast non-dimmable, multiwatt |
| Electrical voltage           | 220-240V                                   |
| Frequency                    | 50/60Hz                                    |

 **CE** IP 20

# Curve



## Downloads

Installation instructions



Photos



**Accessories**

**00-01000**  
reflector 18°



**00-01001**  
reflector 25°



**00-01002**  
reflector 32°



**00-01003**  
reflector 52°



**00-01100**  
Satinice diffuser