




## Luminaire

# Shift-C

26-200S-10GGE/940, W



## Technical drawing

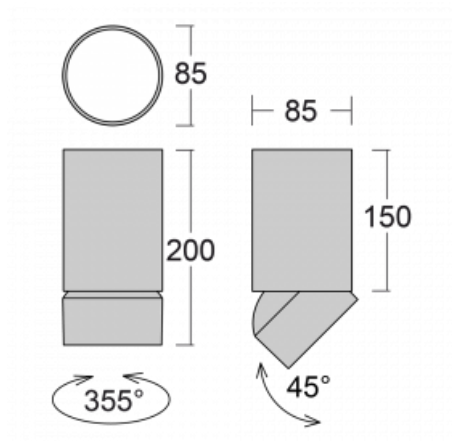


|                           |                      |
|---------------------------|----------------------|
| Type of installation      | Surface              |
| Light distribution        | Direct               |
| Luminaire shape           | Circular             |
| Colour of the luminaires  | White                |
| Material                  | Aluminium            |
| Lifetime                  | L80/B20 50 000 hours |
| Warranty                  | 60 months            |
| Description of luminaires | Luminaire surface    |
| Dimensions                | ø 85 mm × 200 mm     |
| Light source              | LED MODUL            |

|                        |                   |
|------------------------|-------------------|
| Type of optical system | Reflector         |
| Luminous flux          | 1810 lm ± 10 %    |
| Colour Temperature     | 4000 K cool white |
| Luminous efficacy      | 105 lm/W          |
| MacAdam Light source   | 3                 |
| Colour rendering index | 90                |
| Beam angle             | 18°               |

|                              |                                 |
|------------------------------|---------------------------------|
| Luminaire power input        | 17.3 W ± 10 %                   |
| Connection of the luminaires | Electronic ballast non-dimmable |
| Electrical voltage           | 220-240V                        |
| Frequency                    | 50/60Hz                         |

⊕ CE IP 20

Curve

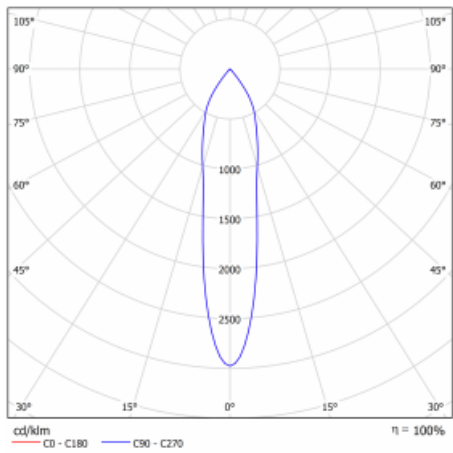

## Accessories



**00-01000**  
reflector 18°



**00-01001**  
reflector 25°



**00-01002**  
reflector 32°



**00-01003**  
reflector 52°



**00-01100**  
Satinice diffuser



**00-01101**  
Linear optic