



## Luminaire

# Shift


26-200S-50GDE/930, W



Designer Kryštof Nosál has created a luminaire with unrivalled variability. In addition, the Shift family of single luminaires allows for any method of installation. You can choose between a semi-recessed, surface and pendant version. The spot LED luminaire consists of 1, 2, 3 or 5 light sources, which can be moved along the axis of the luminaire body, tilted up to an angle of 45° and rotated up to 355°. The luminaire has 4 beam angles of 15°, 25°, 36°, 60°.

Design Kryštof Nosál

## Technical drawing

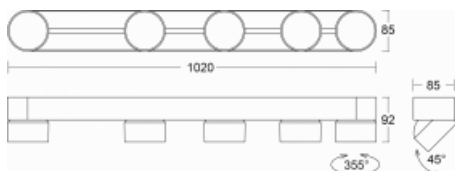

|  |                         |
|--|-------------------------|
| Type of installation                   | Surface                 |
| Light distribution                     | Direct                  |
| Luminaire shape                        | Rounded                 |
| Colour of the luminaires               | White                   |
| Material                               | Aluminium               |
| Lifetime                               | L80/B20 50 000 hours    |
| Warranty                               | 5 years                 |
| Description of luminaires              | Luminaire surface       |
| Dimensions                             | 1020 mm × 85 mm × 92 mm |
| Light source                           | LED MODUL               |
| Type of optical system                 | Reflector               |
| Luminous flux*                         | 1000 lm                 |
| Colour Temperature                     | 3000 K warm white       |
| Luminous efficacy                      | 108 lm/W                |
| MacAdam Light source                   | 3                       |
| Colour rendering index                 | 90                      |
| Beam angle                             | 18°                     |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 16.1                    |

## Curve



Luminaire power input\* 46.5 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

\*±10 %

## Downloads

Installation instructions



Photos



**Accessories**



**00-01000**  
reflector 18°



**00-01001**  
reflector 25°



**00-01002**  
reflector 32°



**00-01003**  
reflector 52°



**00-01100**  
Satinice diffuser



**00-01101**  
Linear optic