




Luminaire

Shift-C

26-500F-10GDE/940, B



Technical drawing

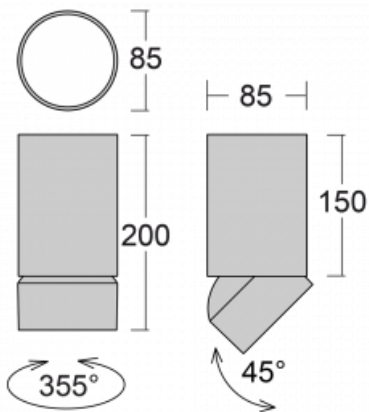

| | |
|------------------------------|---------------------------------|
| Type of installation | Suspended |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire suspended |
| Dimensions | ø 85 mm × 200 mm |
| Light source | LED MODUL |
| Type of optical system | Reflector |
| Luminous flux | 1060 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 112 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 90 |
| Beam angle | 32° |
| Luminaire power input | 9.5 W ± 10 % |
| Connection of the luminaires | Electronic ballast non-dimmable |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |


 CE IP 20

Curve



Accessories**00-01000**
reflector 18°**00-01001**
reflector 25°**00-01002**
reflector 32°**00-01003**
reflector 52°**00-01100**
Satinice diffuser**00-01101**
Linear optic