



## Luminaire

# Shift


26-500U-50GDE/940, S



Designer Kryštof Nosál has created a luminaire with unrivalled variability. In addition, the Shift family of single luminaires allows for any method of installation. You can choose between a semi-recessed, surface and pendant version. The spot LED luminaire consists of 1, 2, 3 or 5 light sources, which can be moved along the axis of the luminaire body, tilted up to an angle of 45° and rotated up to 355°. The luminaire has 4 beam angles of 15°, 25°, 36°, 60°.

Design Kryštof Nosál

## Technical drawing

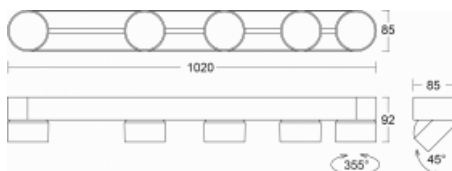

|                                   |                         |
|-----------------------------------|-------------------------|
| Type of installation              | Suspended               |
| Light distribution                | Direct                  |
| Luminaire shape                   | Rounded                 |
| Colour of the luminaires          | Silver                  |
| Material                          | Aluminium               |
| Lifetime                          | L80/B20 50 000 hours    |
| Warranty                          | 60 months               |
| Description of luminaires         | Luminaire suspended     |
| Dimensions                        | 1020 mm × 85 mm × 92 mm |
| Light source                      | LED MODUL               |
| Type of optical system            | Reflector               |
| Luminous flux                     | 1060 lm ± 10 %          |
| Colour Temperature                | 4000 K cool white       |
| Luminous efficacy                 | 114 lm/W                |
| MacAdam Light source              | 3                       |
| Colour rendering index            | 90                      |
| Beam angle                        | 25°                     |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 14.9                    |

## Curve



Luminaire power input 46.5 W  $\pm$  10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20


## Downloads

Installation instructions



Photos



**Accessories****00-01000**  
reflector 18°**00-01001**  
reflector 25°**00-01002**  
reflector 32°**00-01003**  
reflector 52°**00-01100**  
Satinice diffuser**00-01101**  
Linear optic