



## Luminaire

# Rundo


290-261K-10GGD/840, W +  
00-00384-1000/RUN, W



Circular luminaires with an aluminium profile come in two heights, 62 mm and 87 mm. Rundo luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Rundo luminaires with a diameter of up to 1150 mm can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

|                                   |                      |
|-----------------------------------|----------------------|
| Type of installation              | Suspended            |
| Light distribution                | Direct-indirect      |
| Luminaire shape                   | Circular             |
| Colour of the luminaires          | White                |
| Material                          | Aluminium            |
| Lifetime                          | L80/B20 50 000 hours |
| Warranty                          | 60 months            |
| Description of luminaires         | Luminaire suspended  |
| Dimensions                        | ø 630 mm × 24 mm     |
| Weight                            | 6.6 kg               |
| Light source                      | LED MODUL            |
| Type of optical system            | Opal diffuser        |
| Luminous flux                     | 3600 lm ± 10 %       |
| Colour Temperature                | 4000 K cool white    |
| Luminous efficacy                 | 150 lm/W             |
| MacAdam Light source              | 3                    |
| Colour rendering index            | 80                   |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 18.8                 |

Technical drawing

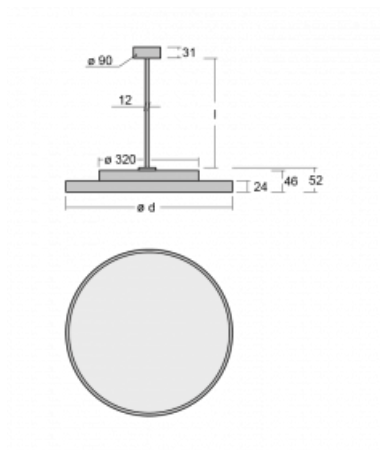

|                              |               |
|------------------------------|---------------|
| Luminaire power input        | 24 W ± 10 %   |
| Connection of the luminaires | DALI dimmable |
| Electrical voltage           | 220-240V      |
| Frequency                    | 50/60Hz       |

⊕ CE IP 40

## Downloads

[Installation instructions](#)[Photos](#)