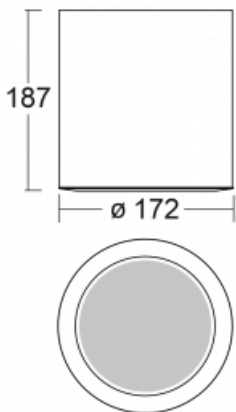



**Luminaire**

# Ravo-C

55-283K-10GDM3/830, B


**Technical drawing**


Type of installation	Surface, Suspended
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium/Plastic
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/suspended
Dimensions	ø 172 mm × 187 mm
Light source	LED MODUL

Type of optical system	Opal diffuser
------------------------	---------------

Luminous flux	1080 lm ± 10 %
---------------	----------------

Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy	113 lm/W
-------------------	----------


MacAdam Light source	3
----------------------	---

Colour rendering index	80
------------------------	----

Beam angle	64°
------------	-----

UGR max. X=4H Y=8H, $\rho=70,50,20$	18.8
--	------

## Curve

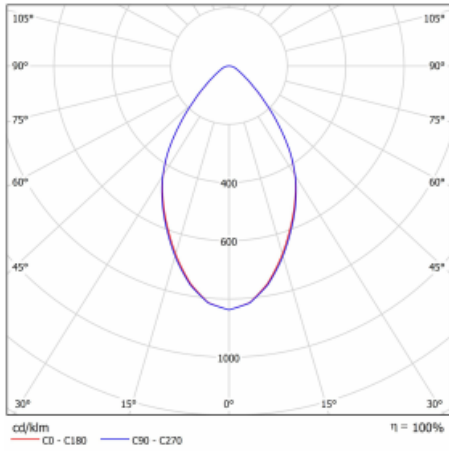

Luminaire power input 9.6 W ± 10 %

Connection of the luminaires Electronic ballast non-dimmable with 3h emergency

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

## Accessories



**00-00399, B**  
suspension set  
2000mm, 1 pcs.of  
wires, cable  
5x0,75mm, ceiling  
cup