




Luminaire

Ravo-C

55-283K-10GDM3/840, B



Technical drawing

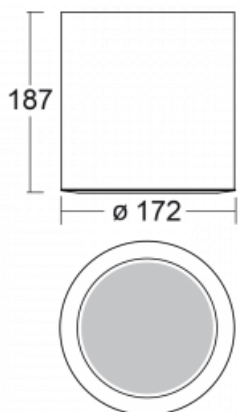

| | |
|---------------------------|-----------------------------|
| Type of installation | Surface, Suspended |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium/Plastic |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire surface/suspended |
| Dimensions | ø 172 mm × 187 mm |
| Light source | LED MODUL |

| | |
|------------------------|---------------|
| Type of optical system | Opal diffuser |
|------------------------|---------------|

| | |
|----------------|---------|
| Luminous flux* | 1130 lm |
|----------------|---------|

| | |
|--------------------|-------------------|
| Colour Temperature | 4000 K cool white |
|--------------------|-------------------|

| | |
|-------------------|----------|
| Luminous efficacy | 118 lm/W |
|-------------------|----------|

| | |
|----------------------|---|
| MacAdam Light source | 3 |
|----------------------|---|

| | |
|------------------------|----|
| Colour rendering index | 80 |
|------------------------|----|

| | |
|------------|-----|
| Beam angle | 64° |
|------------|-----|

| | |
|--|----|
| UGR max. X=4H Y=8H, $\rho=70,50,20$ | 19 |
|--|----|

Curve



Luminaire power input* 9.6 W

Connection of the luminaires ON/OFF + 3h emergency

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

*±10 %

Accessories



00-00399, B
suspension set
2000mm, 1 pcs.of
wires, cable
5x0,75mm, ceiling
cup