



Luminaire


Basi 2.0

71-008F-10GDV/930, B +
00-00156E




We have expanded the Basi family with new small siblings. We offer the new additions in white at no extra charge. They achieve maximum luminous fluxes of 650 lm and 1500 lm and a colour rendering index of Ra90. These unobtrusive but efficient downlights have beam angles of 15°, 24°, 36° (40°).

Technical drawing

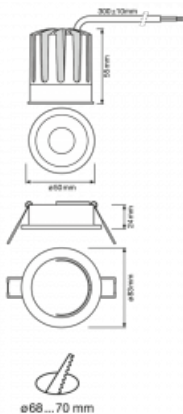

| | |
|---------------------------|--|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L70/B50 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire recessed |
| item description | Basi 2.0 - 50 mm |
| Dimensions | $\varnothing 83 \text{ mm} \times 79 \text{ mm}$ |
| Weight | 0.25 kg |
| Light source | LED MODUL |
| Type of optical system | FLOOD - wide angle |
| Luminous flux* | 1260 lm |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 98 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 90 |
| Beam angle | 40° |

Curve

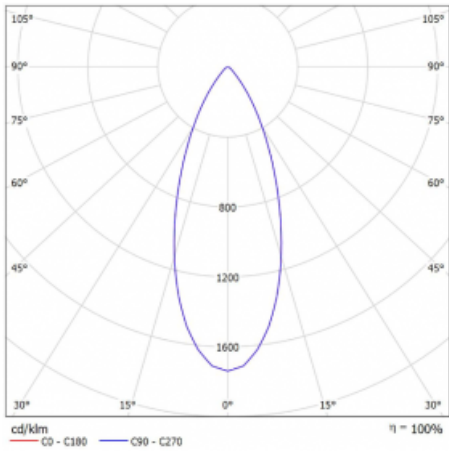

Luminaire power input* 12.8 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

☐ CE IP 20

*±10 %