


Luminaire

Basi 2.0

71-008S-10GDV/930, B +
00-00156D




We have expanded the Basi family with new small siblings. We offer the new additions in white at no extra charge. They achieve maximum luminous fluxes of 650 lm and 1500 lm and a colour rendering index of Ra90. These unobtrusive but efficient downlights have beam angles of 15°, 24°, 36° (40°).

Technical drawing


| | |
|---------------------------|----------------------|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L70/B50 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire recessed |
| item description | Basi 2.0 - 50 mm |
| Dimensions | ø 83 mm × 79 mm |
| Light source | LED MODUL |
| Type of optical system | SPOT - narrow angle |
| Luminous flux | 1090 lm ± 10 % |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 85 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 90 |
| Beam angle | 15° |

Curve

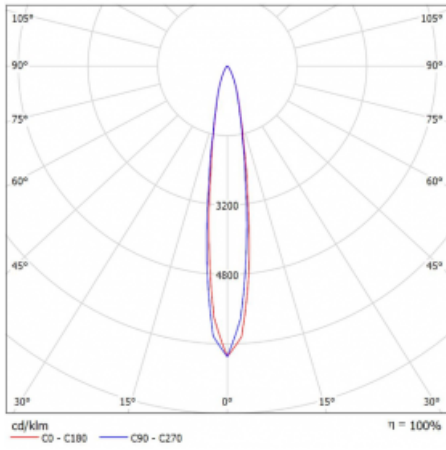

Luminaire power input 12.8 W ± 10 %

Connection of the luminaires DALI dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

☐ CE IP 20