



Luminaire


Basi 2.0

71-008U-10GDV/930, W +
00-00156E




We have expanded the Basi family with new small siblings. We offer the new additions in white at no extra charge. They achieve maximum luminous fluxes of 650 lm and 1500 lm and a colour rendering index of Ra90. These unobtrusive but efficient downlights have beam angles of 15°, 24°, 36° (40°).

Technical drawing

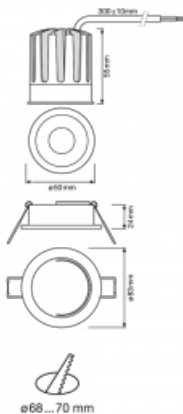

Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L70/B50 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
item description	Basi 2.0 - 50 mm
Dimensions	$\varnothing 83 \text{ mm} \times 79 \text{ mm}$
Weight	0.25 kg
Light source	LED MODUL
Type of optical system	MEDIUM - middle angle
Luminous flux	1230 lm \pm 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	96 lm/W
MacAdam Light source	3
Colour rendering index	90
Beam angle	24°

Curve

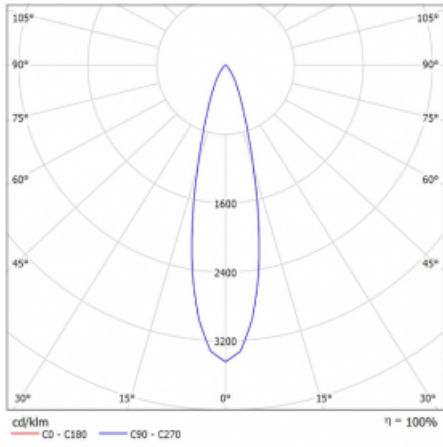

Luminaire power input 12.8 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

☐ CE IP 20