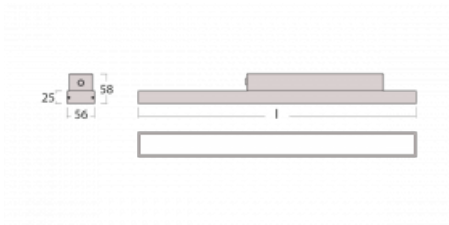



Luminaire

Styrk

86-200K-30GGM3/840, B


The focus on performance is ever greater. No wonder nowadays - that's why we come up with Styrk technical luminaires. They meet strict criteria and have a wide range of applications. They stand out with a luminous flux of 5000 lm/m and a specific luminous flux of 145 lm/w while meeting IP54. Equipped with opal, microprism or PMA, these pendant luminaires can also be easily connected via a connector system. In addition, they can withstand high ambient temperatures of up to 40° C. They are suitable for business centres, data centres and large production halls.

Technical drawing


| | |
|------------------------------|---------------------------------------------------|
| Type of installation | Surface |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | Black |
| Material | Aluminium |
| Lifetime | L90/B50 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire surface |
| Dimensions | 1688 mm × 56 mm × 58 mm |
| Light source | LED MODUL |
| Type of optical system | Opal diffuser |
| Luminous flux | 4830 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 149 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| Luminaire power input | 32.4 W ± 10 % |
| Connection of the luminaires | Electronic ballast non-dimmable with 3h emergency |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

 IP 54

Downloads

Installation instructions



Photos

